



LANDINI AGRO
IMPLEMENTS

AGRICULTURE **IMPLEMENTS**

PRODUCT CATALOGUE - 2026

- HIGH PERFORMANCE
- HEAVY DUTY
- MADE IN INDIA



LANDINI AGRO PVT. LTD.

Opp. Tikola Sugar Mill, Meerut-Bijnor Road, Khasra No. 481,
Pargana Bhumma Sambhalhera, Putthi Ibrahimpur,
Tehsil Jansath, Muzaffarnagar, Uttar Pradesh – 251320, India

GST NO. : 09AAGCL7353Q1Z0

 www.landiniagro.com |  +91-9888617172, +91-9997766999



SALIENT FEATURES

- Advanced Multi-Speed Gearbox with adjustable rotor speed options (540 / 1000 PTO compatibility).
- Heavy-duty Gear Drive Transmission for efficient power transfer and long service life.
- Ensures fine soil pulverization and uniform mixing of crop residue.
- Low maintenance design with high durability components.
- Ideal tillage depth range of 102–203 mm for effective seedbed preparation.
- Heavy-duty side plates and sturdy frame construction for tough field performance.
- Optimized rotor RPM combinations for different soil types and field conditions.

Robust multi-speed gearbox with strong frame for smooth performance and lasting durability.



Landini Agro Pvt. Ltd.

Opp. Tikola Sugar Mill, Meerut–Bijnor Road, Khasra No. 481, Pargana Bhumma Sambhalhera, Putthi Ibrahimpur, Tehsil Jansath, Muzaffarnagar, Uttar Pradesh – 251320, India

WWW.LANDINIAGRO.COM



MULTI SPEED ROTAVATOR




LANDINI AGRO
IMPLEMENTS

Tractor Power (HP)	45+	55+	65+	75+	80+	90+
Rotavator Size	5 FEET	6 FEET	7 FEET	8 FEET	9 FEET	10 FEET
Total Width (mm)	1750	2050	2300	2600	2900	3200
Height (mm)	1120	1120	1120	1120	1120	1120
Weight (Kg)	415	445	490	540	575	650
PTO Speed RPM	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000
No of Blade	36	42	48	54	60	66
TPL Std	Cat-II	Cat-II	Cat-II	Cat-II	Cat-II	Cat-II
Transmission Type	Gear	Gear	Gear	Gear	Gear	Gear
Gear Box	Multispeed	Multispeed	Multispeed	Multispeed	Multispeed	Multispeed
Tillage Depth (mm)	102-203					



The company reserves absolute rights to modify the specifications of machine and components therein without any prior notice.

"Weight is including safety guards & excluding PTO"

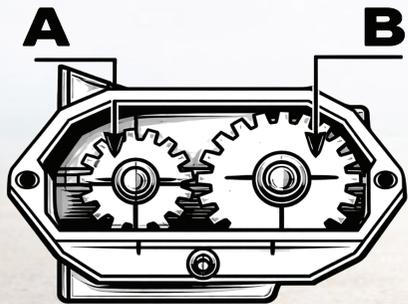

Rotor Speed Chart For Multi Speed			
A	B	540 RPM	1000 RPM
13	22	—	242
15	20	168	—
20	15	173	—
16	19	178	—
19	16	183	—
17	18	188	—
18	17	193	—

Boron Steel Blades

(Longer Life & Hard to break & bend)

Landini Agro Pvt. Ltd.

Opp. Tikola Sugar Mill, Meerut-Bijnor Road, Khasra No. 481, Pargana Bhumma Sambhalhera, Putthi Ibrahimpur, Tehsil Jansath, Muzaffarnagar, Uttar Pradesh – 251320, India

WWW.LANDINIAGRO.COM





SALIENT FEATURES

- Strong Cat-II 3-Point Linkage for secure mounting and stable operation.
- Adjustable tillage depth range of 112–223 mm for effective field conditioning.
- Heavy-duty side plates and reinforced frame construction for tough field performance.
- Low maintenance design with high durability components.
- Wide working width options (5 FT to 10 FT) suitable for 45 HP to 90+ HP tractors.
- Heavy-duty side plates and sturdy frame construction for tough field performance.

Powerful Multi-Speed Gear System with Double Shaft Design for Strong, Smooth and Reliable Performance.



Landini Agro Pvt. Ltd.

Opp. Tikola Sugar Mill, Meerut–Bijnor Road, Khasra No. 481, Pargana Bhumma Sambhalhera, Putthi Ibrahimpur, Tehsil Jansath, Muzaffarnagar, Uttar Pradesh – 251320, India

WWW.LANDINIAGRO.COM




DOUBLE SHAFT MULTI SPEED ROTAVATOR



LANDINI AGRO
IMPLEMENTS

Tractor Power (HP)	45+	55+	65+	75+	80+	90+
Rotavator Size	5 FEET	6 FEET	7 FEET	8 FEET	9 FEET	10 FEET
Total Width (mm)	1770	2070	2320	2620	2920	3220
PTO Speed RPM	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000
No of Blade	40	50	56	62	68	76
TPL Std	Cat-II	Cat-II	Cat-II	Cat-II	Cat-II	Cat-II
Transmission Type	Gear	Gear	Gear	Gear	Gear	Gear
Gear Box	Multispeed	Multispeed	Multispeed	Multispeed	Multispeed	Multispeed
Tillage Depth (mm)	112-223					

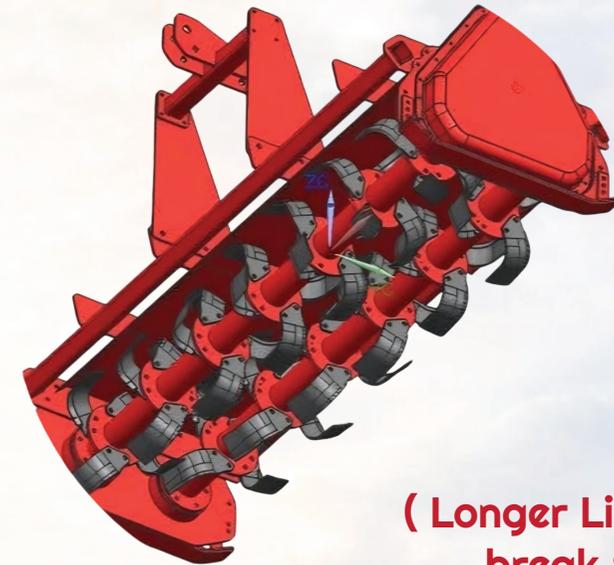

(Longer Life & Hard to break & bend)




The company reserves absolute rights to modify the specifications of machine and components therein without any prior notice.

"Weight is including safety guards & excluding PTO"

Boron Steel Blades

Rotor Speed Chart For Multi Speed			
A	B	540 RPM	1000 RPM
13	22	—	242
15	20	168	—
20	15	173	—
16	19	178	—
19	16	183	—
17	18	188	—
18	17	193	—

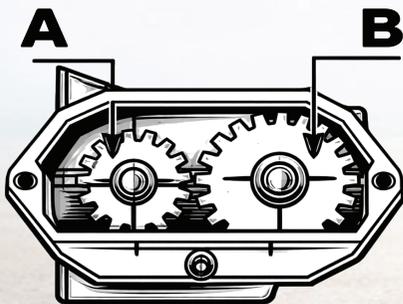

Landini Agro Pvt. Ltd.

Opp. Tikola Sugar Mill, Meerut-Bijnor Road, Khasra No. 481, Pargana Bhumma Sambhalhera, Putthi Ibrahimpur, Tehsil Jansath, Muzaffarnagar, Uttar Pradesh – 251320, India

WWW.LANDINIAGRO.COM



SALIENT FEATURES

- Designed for 35–50 HP tractors, ensuring efficient performance in sugarcane fields.
- 72.5-inch working width (3 lines coverage) for faster inter-row cultivation.
- PTO-operated system (540 RPM) for smooth and reliable power transmission.
- Strong and durable TPL gearbox system for long service life and low maintenance.
- Excavation range of 14–16 inches for deep and effective inter-cultivation.
- Heavy-duty frame construction for stable operation in tough field conditions.



Landini Agro Pvt. Ltd.

Opp. Tikola Sugar Mill, Meerut–Bijnor
Road, Khasra No. 481, Pargana Bhumma
Sambhalhera, Putthi Ibrahimpur, Tehsil
Jansath, Muzaffarnagar, Uttar Pradesh –
251320, India

WWW.LANDINIAGRO.COM



SUGARCANE WEEDER



LANDINI AGRO
IMPLEMENTS

Tractor Power (HP)	35-50 HP
Working Width (Inch)	72.5" (3 Lines)
Type	PTO-operated (540 RPM)
Gear Box	TPL
Weight (Kg)	493 (Approx)
Blade Type	L type
Blade QTY	36 (high-carbon steel blades)
Depth Adjustment	Adjustable
Excavation Area (Inch)	14-16



The company reserves absolute rights to modify the specifications of machine and components therein without any prior notice.

"Weight is including safety guards & excluding PTO"



Landini Agro Pvt. Ltd.

Opp. Tikola Sugar Mill, Meerut-Bijnor
Road, Khasra No. 481, Pargana Bhumma
Sambhalhera, Putthi Ibrahimpur, Tehsil
Jansath, Muzaffarnagar, Uttar Pradesh –
251320, India

WWW.LANDINIAGRO.COM



SALIENT FEATURES

- Suitable for 50–65 HP tractors, ensuring powerful and stable field operation.
- High-capacity bucket size (2110 × 920 × 540 mm) for efficient soil movement and leveling.
- Advanced Laser Guide System for precise land leveling accuracy.
- Fuel-efficient performance with approx. 5.5 ltr/hour consumption.
- Wide working range of 1600 meters for large field coverage.
- Strong hydraulic system with 260 Bar pressure capacity.
- Operates on 12V DC system for reliable laser receiver performance.



Landini Agro Pvt. Ltd.

Opp. Tikola Sugar Mill, Meerut–Bijnor
Road, Khasra No. 481, Pargana Bhumma
Sambhalhera, Putthi Ibrahimpur, Tehsil
Jansath, Muzaffarnagar, Uttar Pradesh –
251320, India

WWW.LANDINIAGRO.COM





Tractor Power (HP)	50-65 HP
Bucket (mm)	2110 × 920 × 540
Efficiency	5.5 ltr/hour
Range	1600 meters
Hydraulic Pressure	260 Bar
Hydraulic Cylinder	Double Acting
Operating Voltage	12V DC
No. of Wheel	4
Tyre Size	6-16
Guide System	Laser



Landini Agro Pvt. Ltd.

Opp. Tikola Sugar Mill, Meerut-Bijnor
Road, Khasra No. 481, Pargana Bhumma
Sambhalhera, Putthi Ibrahimpur, Tehsil
Jansath, Muzaffarnagar, Uttar Pradesh –
251320, India

WWW.LANDINIAGRO.COM

